

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
27 January 2005 (27.01.2005)

PCT

(10) International Publication Number
WO 2005/008639 A2

(51) International Patent Classification⁷: **G11B 7/00**

c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
CHINNA GOUNDEN, Kunasilan [SG/SG]; c/o Prof.
Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number:
PCT/IB2004/051164

(22) International Filing Date: 8 July 2004 (08.07.2004)

(74) Agent: **UITTENBOGAARD, Frank;** Prof. Holstlaan 6,
NL-5656 AA Eindhoven (NL).

(25) Filing Language: English

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(26) Publication Language: English

(30) Priority Data:
03102204.9 17 July 2003 (17.07.2003) EP

(71) Applicant (for all designated States except US): **KONIN-
KLJKE PHILIPS ELECTRONICS N.V. [NL/NL];**
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).


(72) Inventors; and

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

(75) Inventors/Applicants (for US only): **ZHOU, Yu [CN/SG];**

[Continued on next page]

(54) Title: **SERVO SYSTEM**

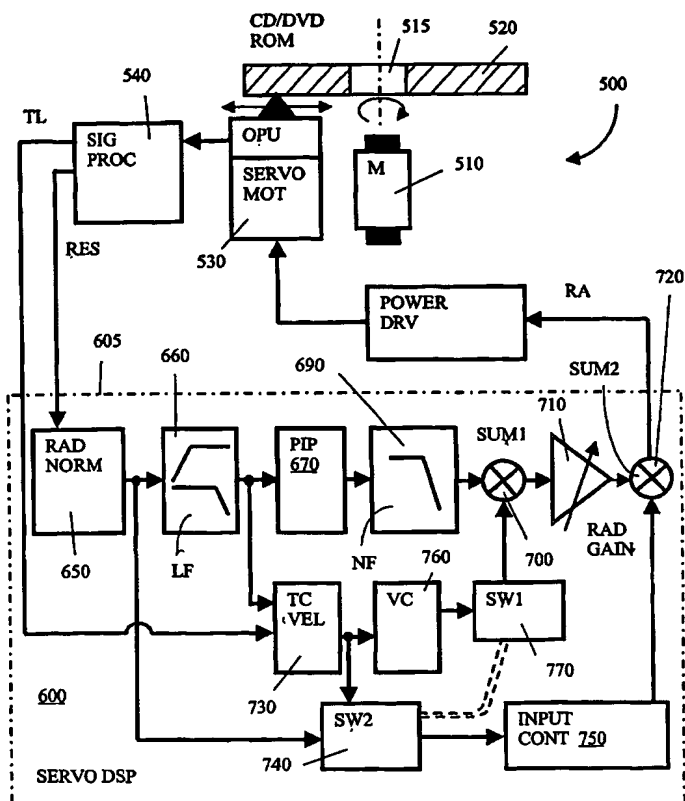

(57) Abstract: There is provided a servo system for controlling position of a sensor assembly (30) in a data readout and/or writing device (10, 500). The device (10, 500) includes: (a) two actuators (28, 36) for spatially actuating a structural assembly (22) and its associated sensor assembly (30, 530), the system further comprising: (b) a servo control unit (34, 600) in communication with the two actuators (28, 36) for controlling spatial movement of the structural assembly (22) and the sensor assembly (30, 530). The controlling means (34) is operable: (c) to apply substantially velocity feedback control to the actuators (28, 36) when the sensor assembly (30, 530) is substantially remote from a desired target position; and (d) to apply substantially position feedback control to the actuators (28, 36) when the sensor assembly (30, 530) is substantially proximate to said target position. The servo control unit (34, 600) further includes pole-compensating filtering means (126) for at least partially compensating response poles of the structural assembly (22) and its sensor assembly (30, 530) so as to result during operation of the system in smoother switching between said substantially velocity feedback control and said position feedback control for enhancing at least one of temporal and spatial responses of the system when controlled by the servo control units (34, 600).

ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

Published:

- *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.